


# IM-2-45-LA0

## Electrical specifications

Winding code : LA	Symbol	Unit	Field weakening & Water cooling
Continuous torque	$T_c$	Nm	151
Continuous current	$I_c$	$A_{rms}$	11.4
Stall torque	$T_s$	Nm	122
Stall current	$I_s$	$A_{rms}$	9.1
Peak torque(for 1sec.)	$T_p$	Nm	286
Peak current(for 1sec.)	$I_p$	$A_{rms}$	23.7
Torque constant	$K_t$	$Nm/A_{rms}$	13.86
Electrical time constant	$T_e$	ms	2.9
Resistance (line to line at 25°C)	$R_{25}$	$\Omega$	8.3
Inductance (line to line)	$L_d / L_q$	mH	23.8 / 34.99
Number of poles	2p		40
Back emf constant (line to line)	$K_v$	$V_{rms}/rad/s$	8
Motor constant (at 25°C)	$K_m$	$Nm/\sqrt{W}$	3.89
Thermal resistance	$R_{th}$	K/W	0.065
Thermal sensor			PTC SNM100+SNM130+Pt1000
Max. DC BUS		$V_{DC}$	750
Inertia of rotor	J	$kgm^2$	0.027
Thermal time constant	$T_{th}$	s	84
Max. continuous power dissipation	$P_c$	W	2284
Max. peak power dissipation	$P_p$	W	9874
Max. speed(at 600VDC)		rpm	1000
Based speed(at 600VDC)		rpm	340
Rated speed(at 600VDC)		rpm	1000


## T-N curve

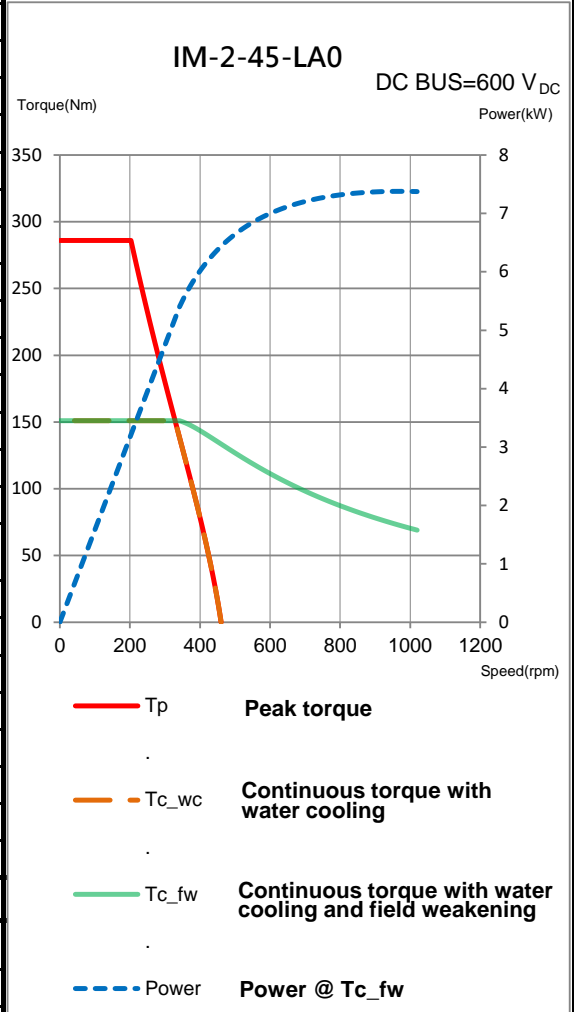

## Mechanical specifications

	Symbol	Unit	Field weakening & Water cooling
Mass of rotor	$M_r$	kg	5.4
Mass of stator	$M_s$	kg	9
Height of stator	$H_s$	mm	90
Height of rotor	$H_r$	mm	78
Length of rotor centring fit	H	mm	17
Water temperature difference for Pc	$\Delta\theta$	K	5
Minimum water flow	q	l/min	6.6
Max. pressure drop	$\Delta p$	bar	1

## Thermal sensor

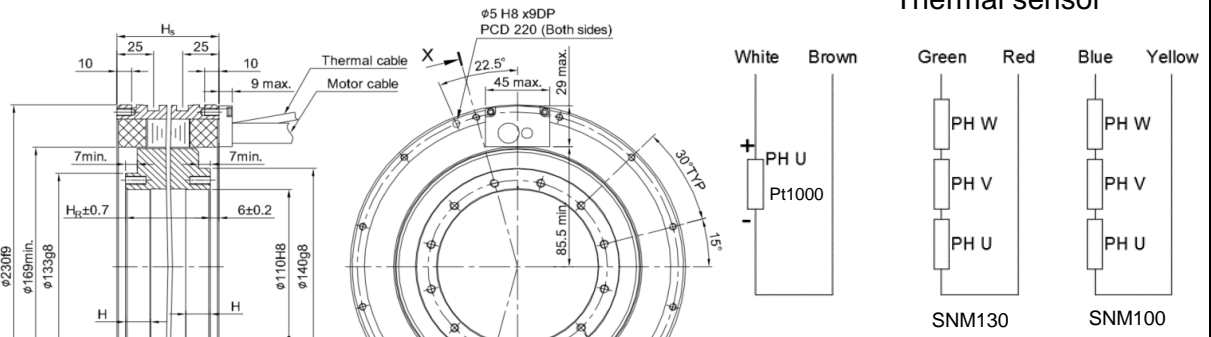

General tolerance mm	
Nominal dimension	Tolerance
~ 6	±0.1
> 6 ~ 30	±0.2
> 30 ~ 120	±0.3
> 120 ~ 300	±0.4
> 300 ~ 600	±0.5
> 600 ~ 1200	±0.8
> 1200 ~ 2400	±1.0
> 2400	±1.5

Motor wire table	
Color or wire no.	Signal
U/L1	PH U
V/L2	PH V
W/L3	PH W
Green/Yellow	GND

Except dimensions, all the specifications in the table are in ±10% of tolerance

Version: 2.00

This drawing is only for reference, detail dimensions please refer to approval drawing.

Date: 2020/10/23