

TMRWDFL Torque Motor




Electrical specifications

Winding code : SH	Symbol	Unit	Free air convection	Water cooling
Continuous torque	T_c	Nm	925	2000
Continuous current	I_c	A_{rms}	48	120
Stall torque	T_s	Nm	648	1400
Stall current	I_s	A_{rms}	33.6	84
Peak torque(for 1sec.)	T_p	Nm	2299.2	3600
Peak current(for 1sec.)	I_p	A_{rms}	144	324
Torque constant	K_t	Nm/Arms	19.35	
Electrical time constant	T_e	ms	8.5	
Resistance (line to line at 25°C)	R_{25}	Ω	0.33	
Inductance (line to line)	L	mH	2.8	
Number of poles	2p		88	
Back emf constant (line to line)	K_v	Vrms/rad/s	11.18	
Motor constant (at 25°C)	K_m	Nm/ \sqrt{W}	27.39	
Thermal resistance	R_{th}	K/W	0.08	0.013
Thermal sensor			PTC SNM100+SNM120+Pt1000	
Max. DC BUS		V_{DC}	750	
Inertia of rotor	J	kgm^2	0.8	
Thermal time constant	T_{th}	s	4220	130
Max. continuous power dissipation	P_c	W	1555	9720
Max. peak power dissipation	P_p	W	70858	
Rated speed(at 600VDC)		rpm	200	

Mechanical specifications


	Symbol	Unit	Free air convection	Water cooling
Mass of rotor	M_r	kg	22	
Mass of stator	M_s	kg	90	
Height of stator	H_s	mm	210	
Height of rotor	H_r	mm	151	
Length of rotor centring fit	H	mm	15	
Water temperature difference for P_c	$\Delta\theta$	K	-	5
Minimum water flow	q	l/min	-	27.8
Max. pressure drop	Δp	bar	-	1

T-N curve

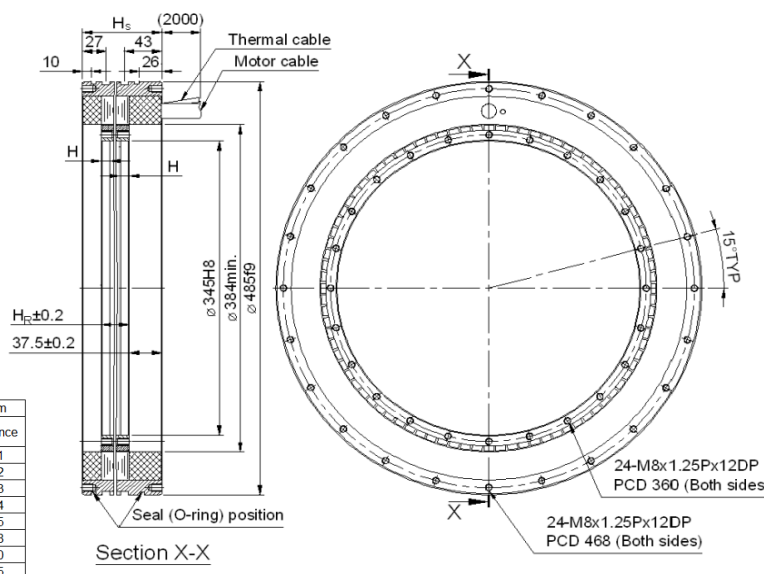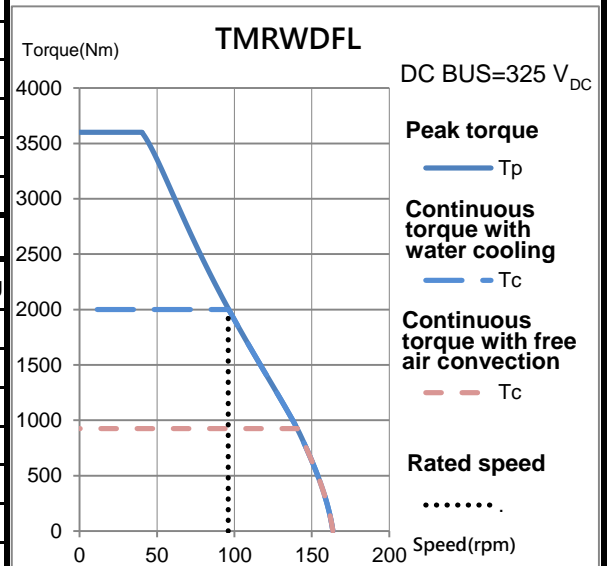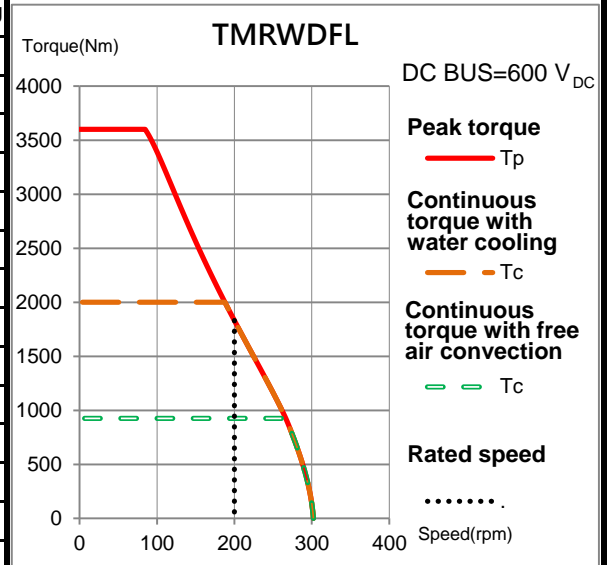

Nominal dimension	Tolerance
~ 6	±0.1
> 6 ~ 30	±0.2
> 30 ~ 120	±0.3
> 120 ~ 300	±0.4
> 300 ~ 600	±0.5
> 600 ~ 1200	±0.8
> 1200 ~ 2400	±1.0
> 2400	±1.5

Thermal sensor

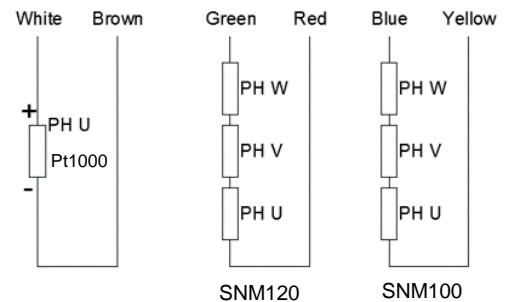

Color or wire no.	Signal
U/L1	PH U
V/L2	PH V
W/L3	PH W
Green/Yellow	GND

Except dimensions, all the specifications in the table are in ±10% of tolerance

Version: 2.00

This drawing is only for reference, detail dimensions please refer to approval drawing.

Date: 2020/10/23